

7.4V 2s1p Remote Control Boat **Battery**

Basic Information

Brand Name: Iohuite

2S LIPO BATTERY Model Number:

• Minimum Order Quantity:

\$11.60/packs 1-49 packs

Packaging Details: as export package

• Supply Ability: 100000 Pack/Packs per Week



Product Specification


. Weight: 139g 7.4V • The Charging Ratio: • The Discharge Rate: 14.8-15.2V 0-45 • Storage Type: 1800mah • Capacity: Cells: 2s 7.4V Voltage Per Pack: • Discharge Rate: 100C-160C

Highlight: 2s1p Remote Control Boat Battery,

7.4V Remote Control Boat Battery



Product Description

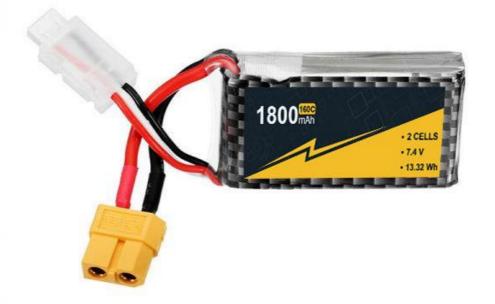

Application



Drones



RC Cars



RC Boat



RC Helicopters



FPV Racing



RC Airplane

Amass Connector

★ Other connector if you need, please feel free contact me, thanks



XT150+AS150 EC5 XT150 EC3 Size(mm) Capacity Weight 88x34x20 2S 2200mah 50C 114g=4oz=0.25lb 131g=4.62oz=0.28lb 2S 2600mah 30C 115x34x17 2S 5000mah 50C 155x48x16 260g=9.17oz=0.57lb 2S 6000mah 60C Hard 138x46x24 295g=10.4oz=0.65lb 2S 7000mah 55C Hard 138x46x24 312g=11oz=0.68lb 125g=4.4oz=0.27lb 3S 1500mah 65C 70x43x22 3S 1500mah 100C 90x34x22 141g=4.97oz=0.31lb 3S 1800mah 50C 142g=5oz=0.31lb 105x34x20 3S 2200mah 30C 106x34x24 168g=5.92oz=0.37lb 3S 2600mah 35C T 115x34x26 189g=6.66oz=0.41lb 3S 3000mah 60C 225g=7.93oz=0.49lb 135x42x21 3S 5000mah 50C 155x48x24 376g=13.26oz=0.86lb 3S 6000mah 50C 155x44x29 425g=14.99oz=0.93lb 3S 6000mah 50C Hard 138x46x39 425g=14.99oz=0.93lb 4S 1500mah 100C 70x43x29 164g=5.78oz=0.36lb 4S 2200mah 30C 106x34x32 220g=7.76oz=0.48lb 4S 3300mah 60C 135x42x30 318g=11.21oz=0.7lb 4S 4000mah 60C 135x42x33 403g=14.21oz=0.88lb 4S 5000mah 50C 492g=17.35oz=1.08lb 155x48x32 4S 6000mah 50C 155x44x38 558g=19.68oz=1.23lb 6S 1800mah 50C 105x34x40 270g=9.52oz=0.59lb 6S 3300mah 60C 135x42x42 436g=15.37oz=0.96lb 6S 5000mah 50C 155x48x48 725g=25.57oz=1.59lb

155x48x54

809g=28.53oz=1.78lb

6S 6000mah 50C

Specification

item value

Warranty 3months-1year

Anode Material Other
Chargeable Yes

Application Toys, Power Tools, BOATS

Battery Size Li-polymer
Brand Name Lohuite

Model Number 2S LIPO BATTERY

Weight 259g The charging ratio 7.4V The discharge rate 7.4-8.4V Storage Type 0-45 Capacity 6000mah Cells 2s 7.4V Voltage per pack Discharge rate 60C-120C

Suggest chargerr Balance charge
Suggest charge rate 1C (Max 5C)

Suggest charger Balance charger
Balancer Connector Type 3PINS JST-XH

Packing & Delivery















WHY CHOOSE US?

Our Factory



Other Supplier



15000 square meter





clean & ordered production line





modern production equipments



handmade workshop

















Lohuite in manufacturing lithium polymer batteries since 2001 for digital devices, hobbies & toys, gps, medical, military, electric vehicles...etc. have 3 series lipo battery: High energy density, Low temperature and high temperature.

Shenzhen Lohuite Technology Co., Ltd.



15007080727





lohuite.com

4105, Unit 1, Building B, No. 999 Meilong Avenue, Jingxin Community, Longhua Street, Longhua District,